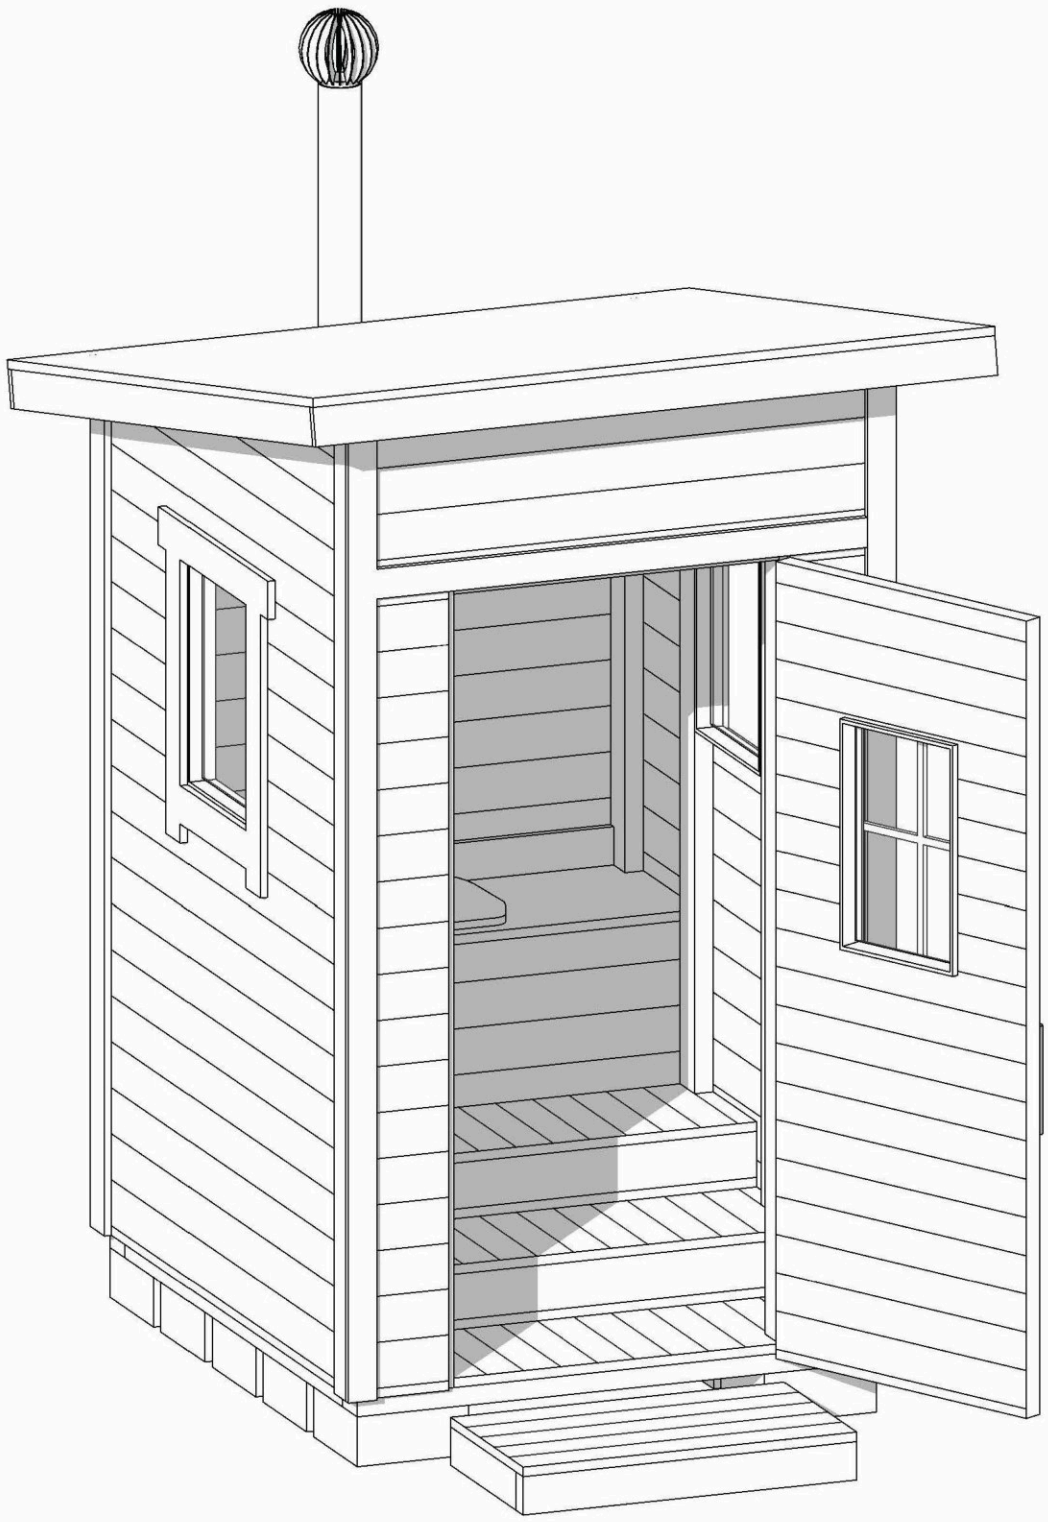


Waterless Toilet Shop

Outhouse Blueprints

Green Toilet 330

US edition (inches) - page 1

waterlesstoiletshop.com

US edition - Green Toilet 330 outhouse

About this US edition

The measurements in this edition were converted from the designer's original metric drawings with the help of AI, rounded to practical fractions of an inch and adapted to US lumber sizes. Small differences from the original are therefore possible.

We give these drawings away free of charge, as a goodwill service to people building their own outhouse; we take no payment for them. They are a guide only, provided as is and without warranty.

Waterless Toilet Shop accepts no responsibility for errors in the converted measurements. Before cutting, the builder is responsible for checking that all dimensions fit together, that the Green Toilet 330 fits the bench and the rear opening, and that the build meets local codes.

The designer's original drawings in millimetres are on pages 6-8 of this document.

All dimensions are in inches, rounded to 1/8" (1/16" at the toilet seat). Dimensions govern: do not scale the drawing.

The original design uses European timber. This edition uses US lumber, so a few spans differ from a straight conversion.

Lumber

Framing, posts, floor joists, rafters	50 x 100 mm	2x4 (actual 1 1/2" x 3 1/2")
Exterior siding	20 mm	1x8 cedar shiplap, exterior grade (actual 3/4")
Floor, bench and step boards	25 mm	5/4 x 6 deck boards (actual 1" x 5 1/2")

Choose stock lengths (8', 10', 12') at your supplier. Check spans and snow load for your area.

Toilet fit - build these exactly

Seat height: 38 1/4" from the bin's level base to the UNDERSIDE of the bench boards (bench top 39 1/4").

Toilet hole: oval, 12 1/4" front-to-back x 9 7/16" across, centre 8 13/16" from the inside face of the rear siding.

Keep at least 3 15/16" of bench in front of the hole. Fit the supplied thermal seat before you cut.

Measure the hole and the bench depth from the same zero line. Remove the bin wheels in use; fit them to move it.

Green Toilet 330 bin: 36 1/4" body + 0-7 7/8" adjustable shaft (36 1/4"-44 1/8"), 33 1/2" x 26" footprint.

The bin is wheeled in and out at the back: keep the rear opening clear, wider than 26" plus the wheels.

Steps: 8" floor, two 6 3/4" risers, bench 17 3/4" above the upper step.

Venting and liquids

4" vent pipe from the bin to above the roof, as straight as possible, with the supplied adapter and a rain cap or fan.


The 5 ft liquids hose runs downhill all the way to the 5 gal canister; leave room to disconnect it.

What changed because of US lumber

Stud bays 15 3/8" and 18 3/4"; door-side wall panels 7 1/4"; interior width 52 1/8"; rafter bays 15 3/8".

Floor: 5 1/2" ground clearance + 1 1/2" joist + 1" deck = 8". Door: 34 5/8" rough opening for a site-built door.

waterlesstoiletshop.com

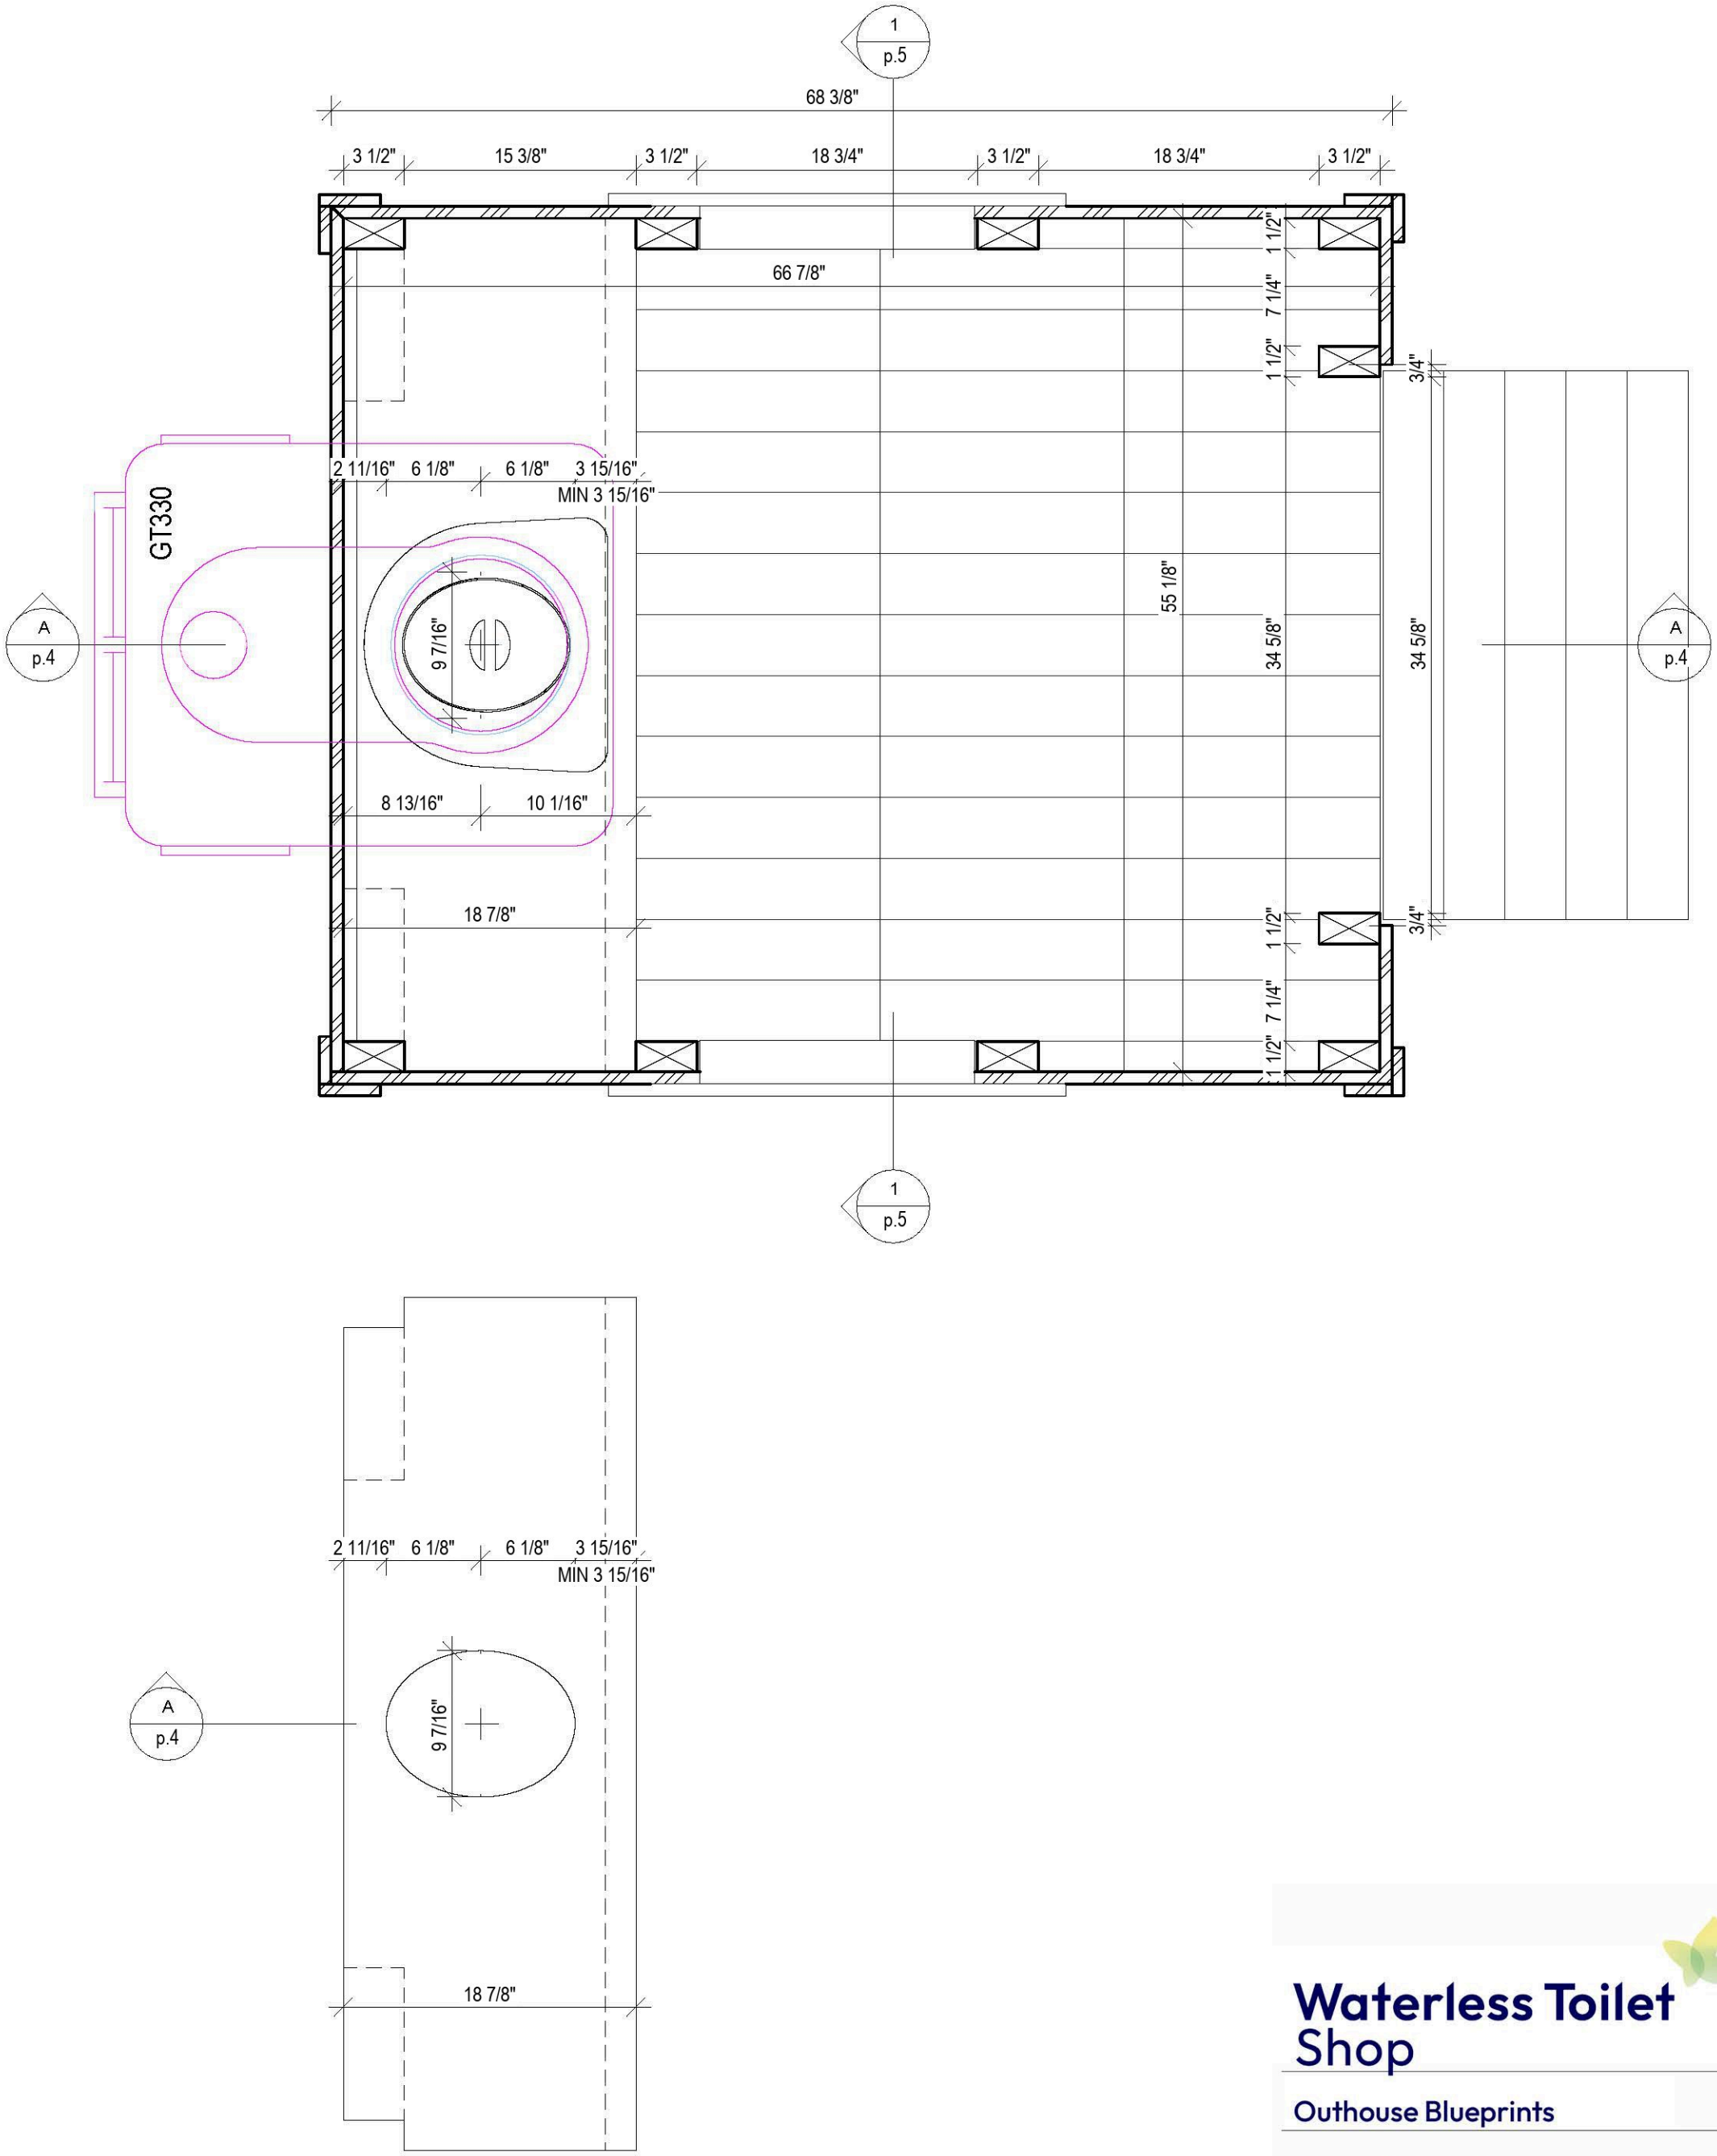

All measurements in inches - read page 2 first


Waterless Toilet Shop

Outhouse Blueprints

Green Toilet 330

page 3 - inches

waterlesstoiletshop.com

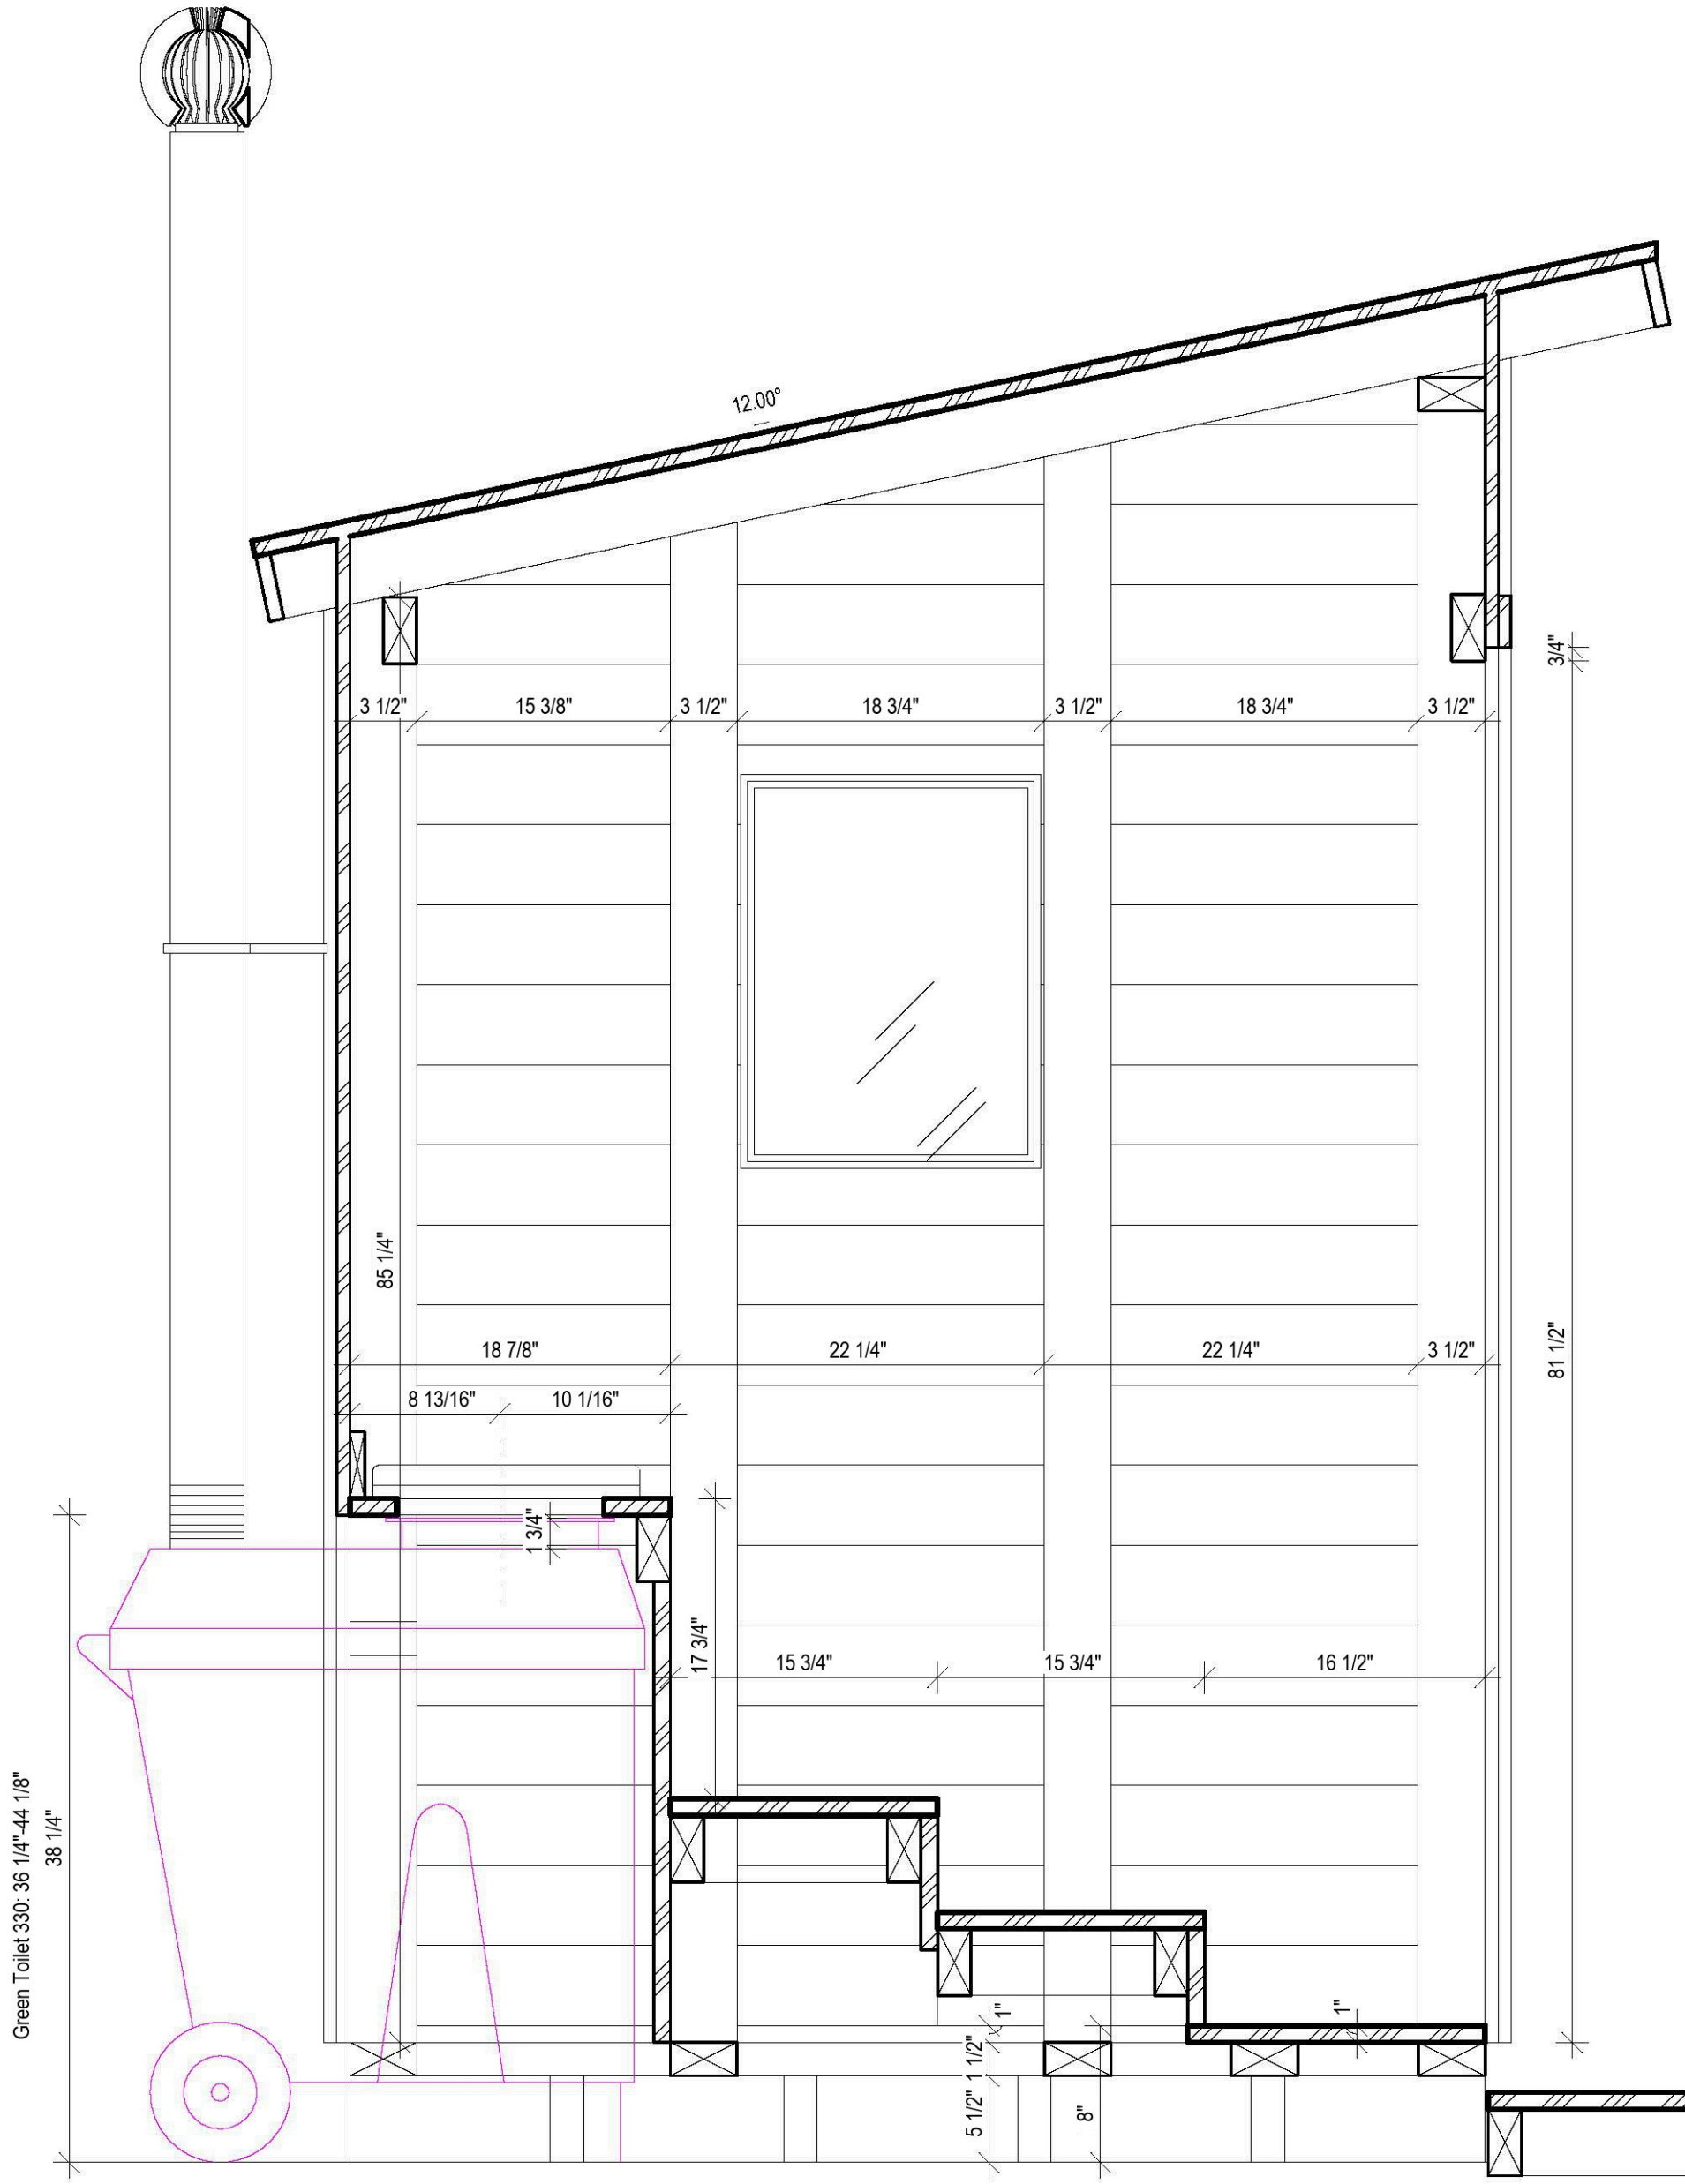


Waterless Toilet Shop

Outhouse Blueprints

Green Toilet 330

page 4 - inches

waterlesstoiletshop.com

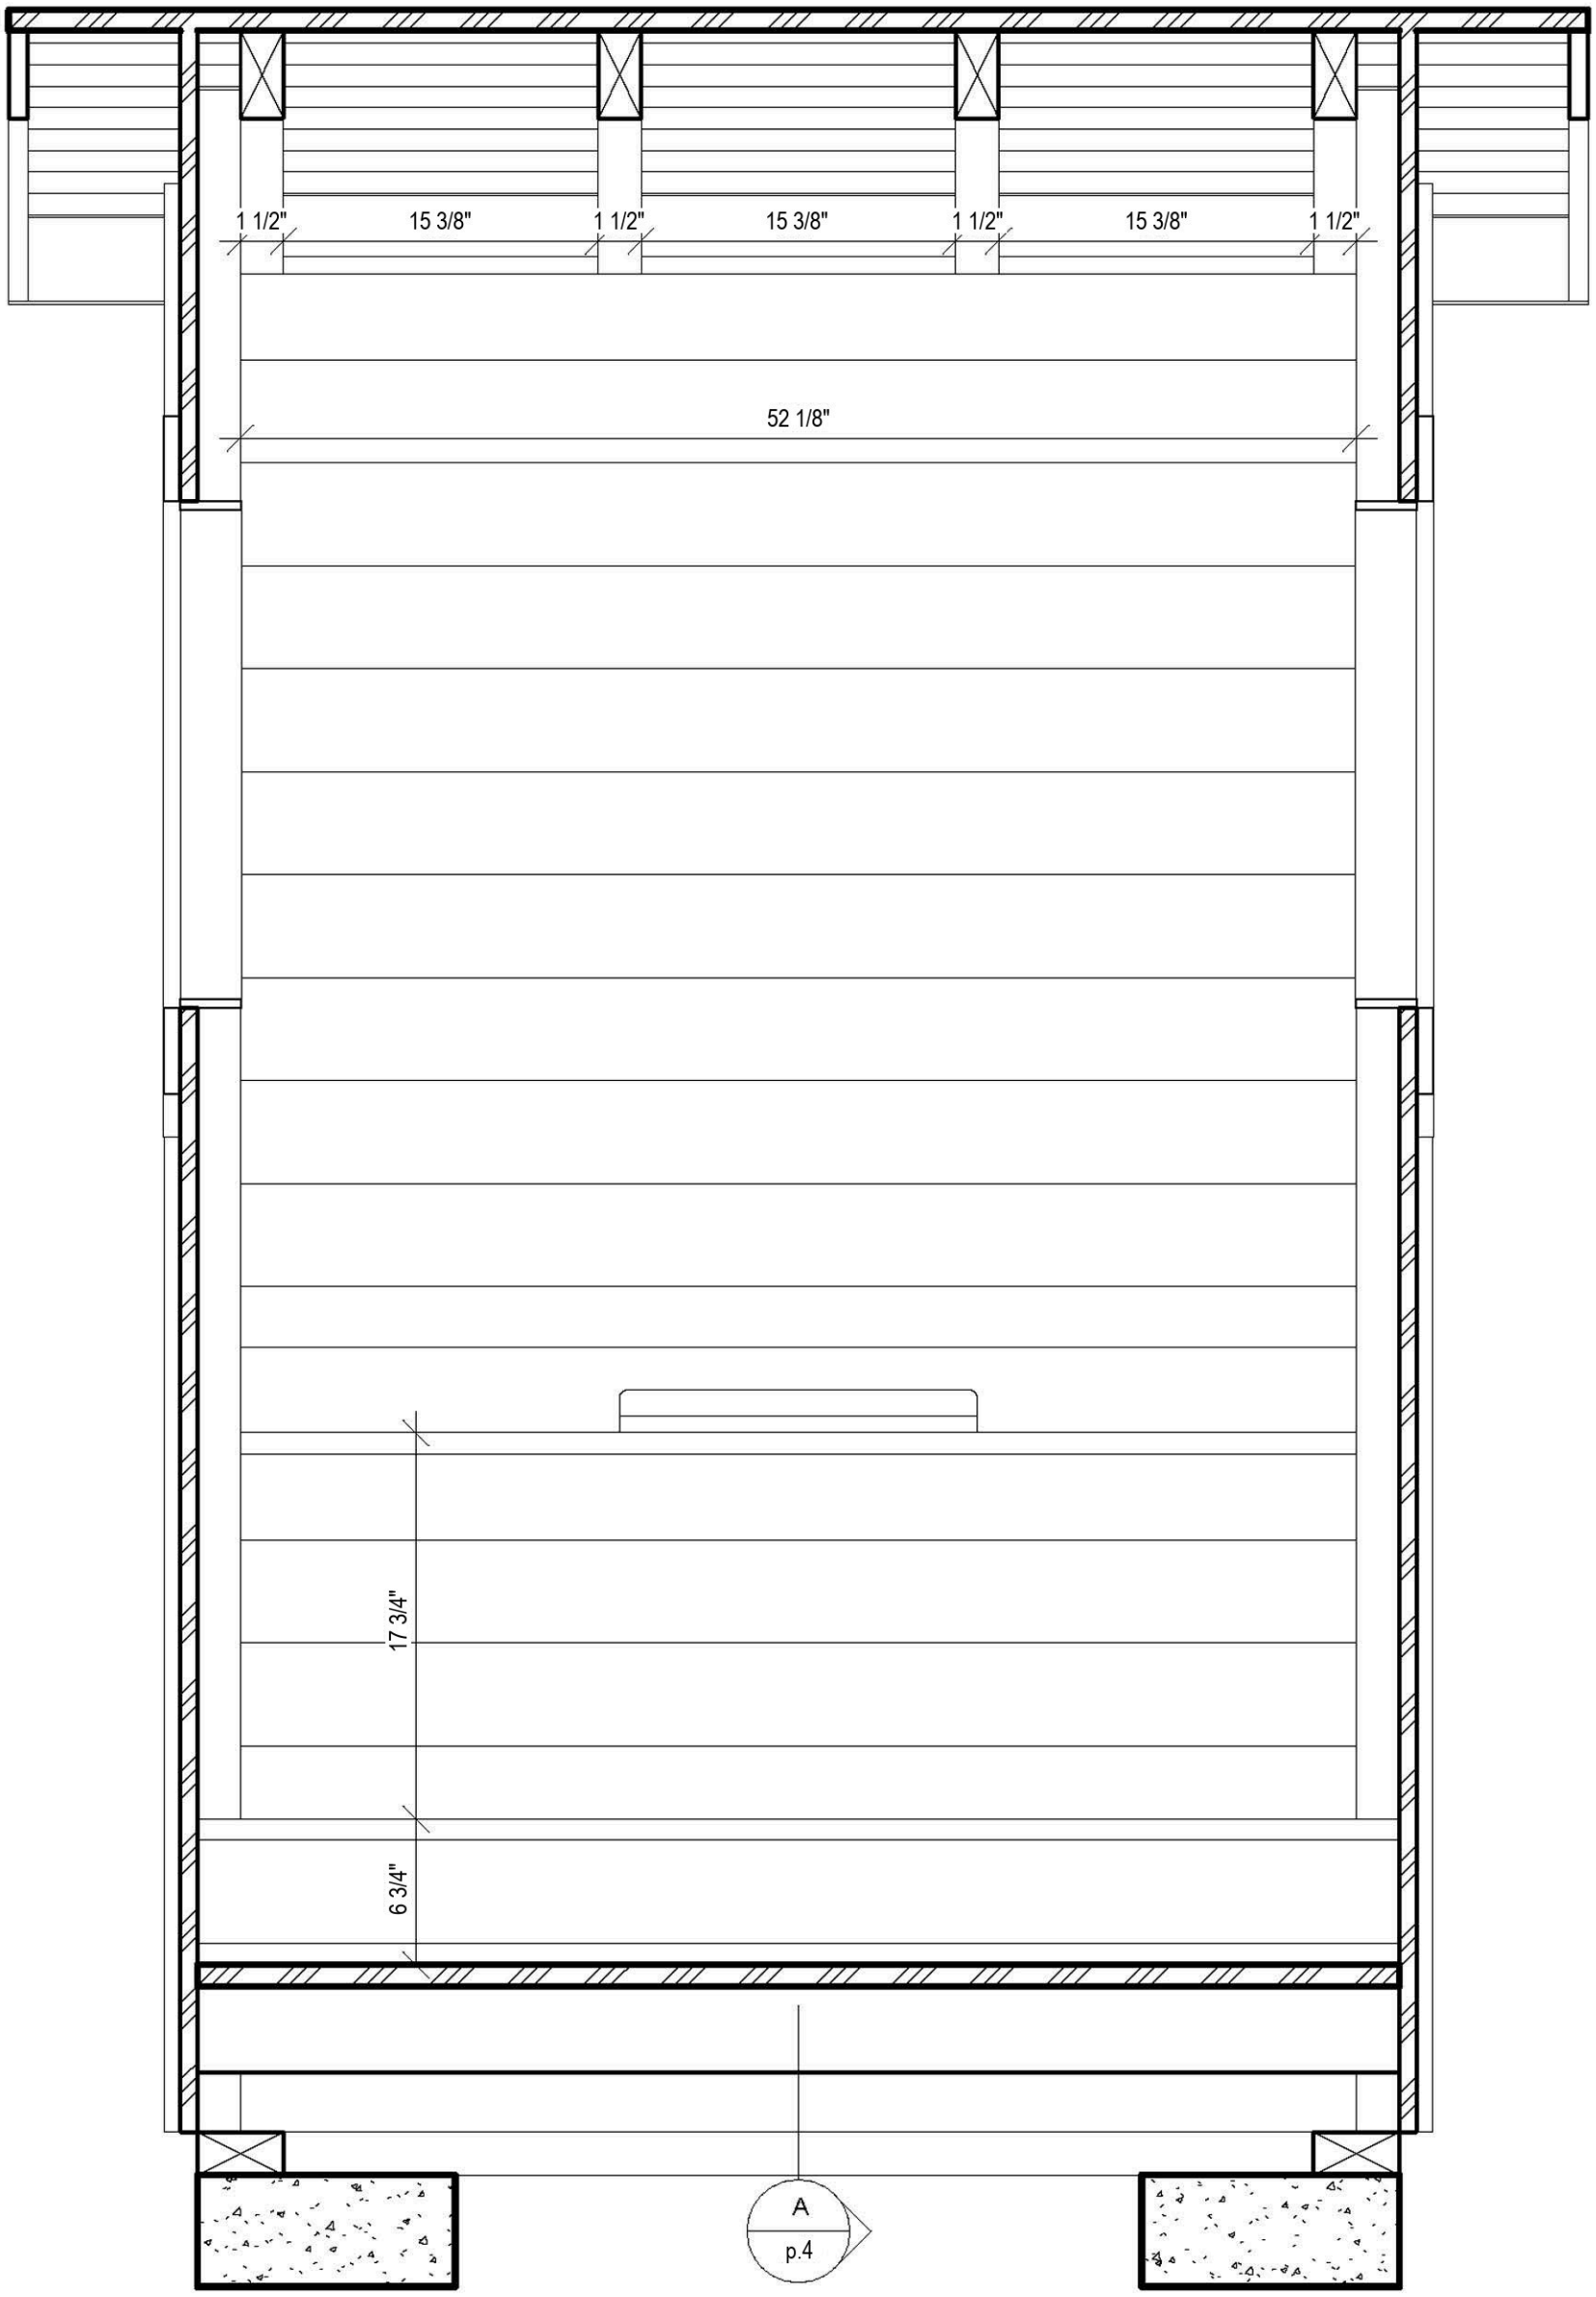


Waterless Toilet Shop


Outhouse Blueprints

Green Toilet 330

page 5 - inches

waterlesstoiletshop.com

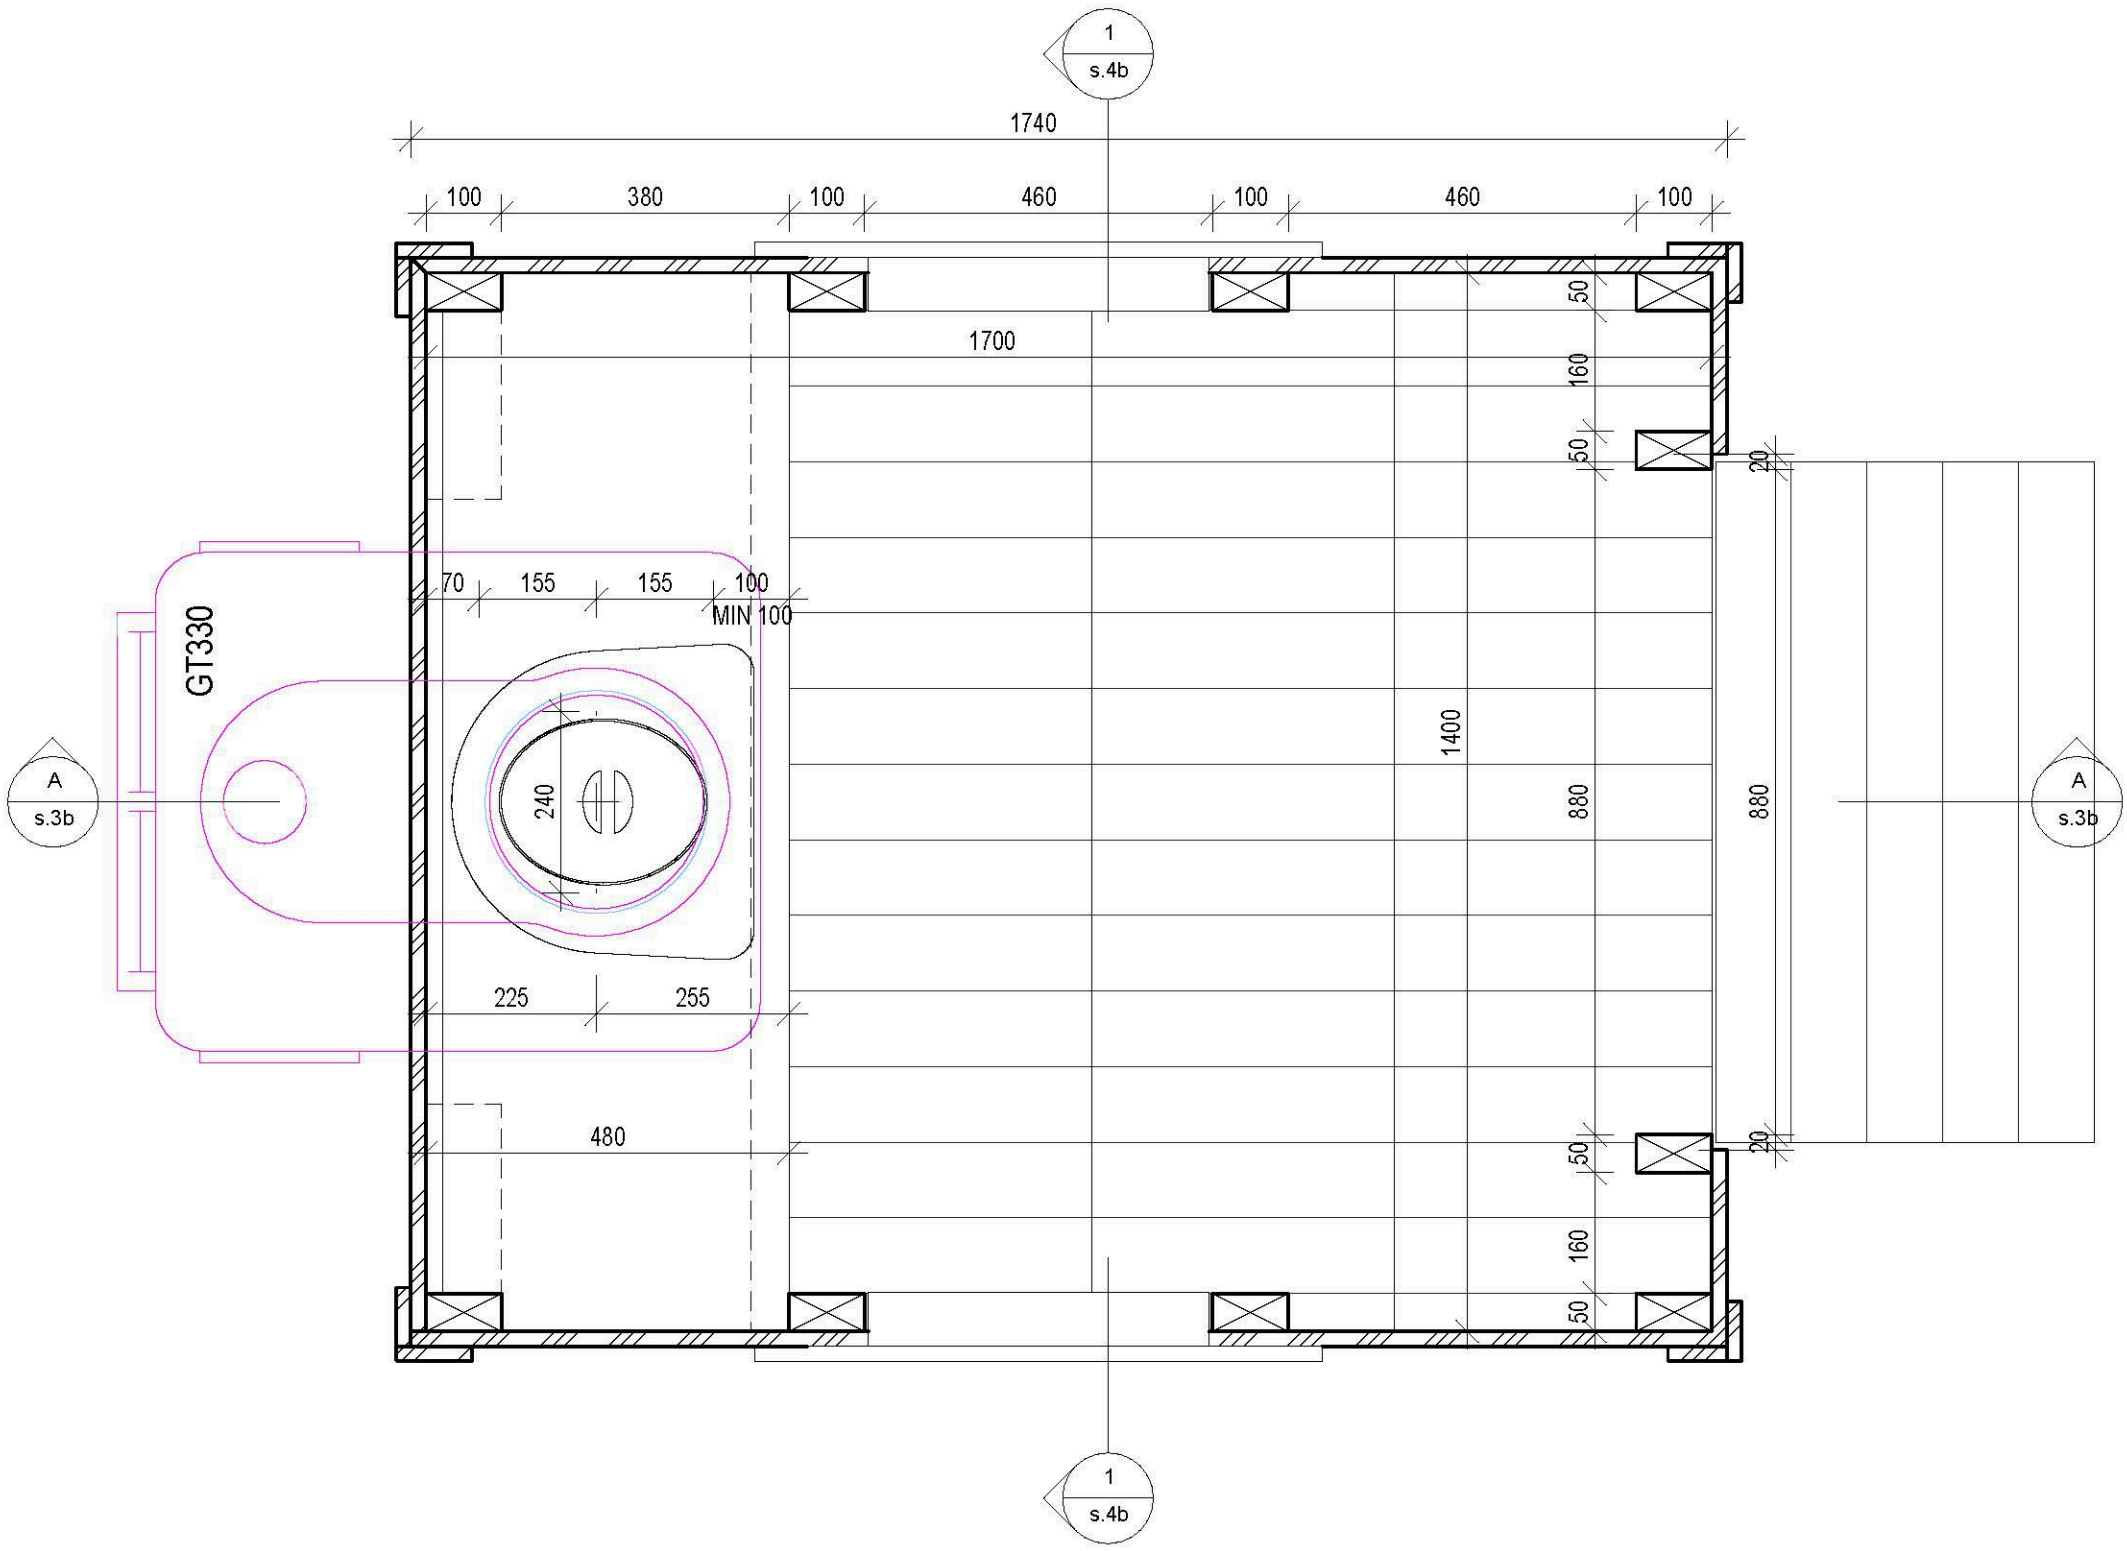

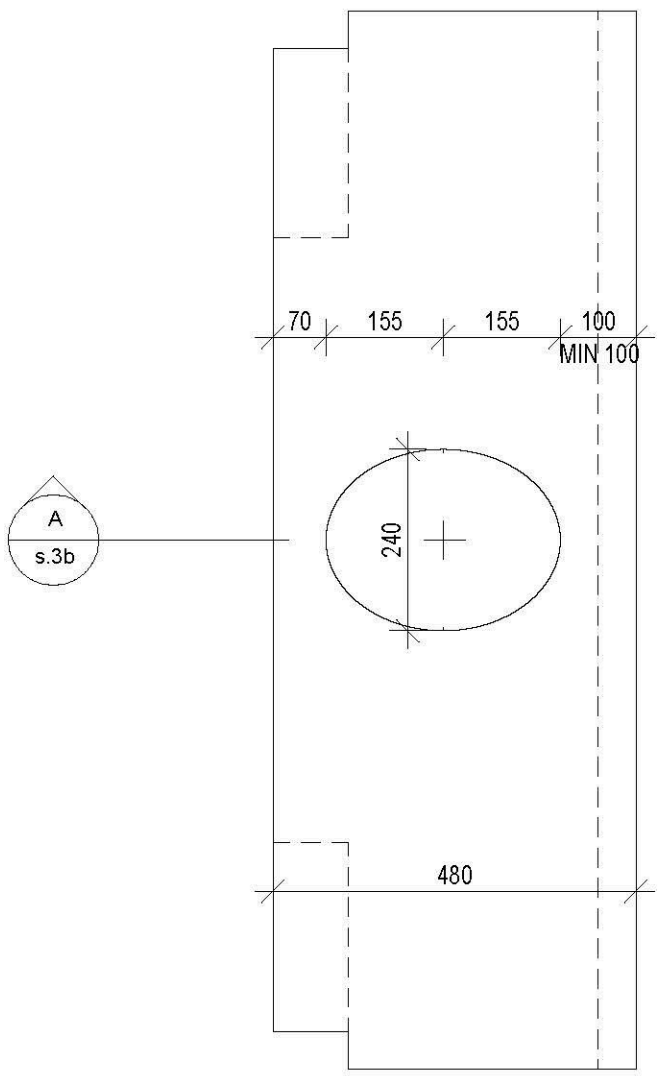

All measurements in millimeters


Waterless Toilet Shop

Outhouse Blueprints

Green Toilet 330

page 2

waterlesstoiletshop.com

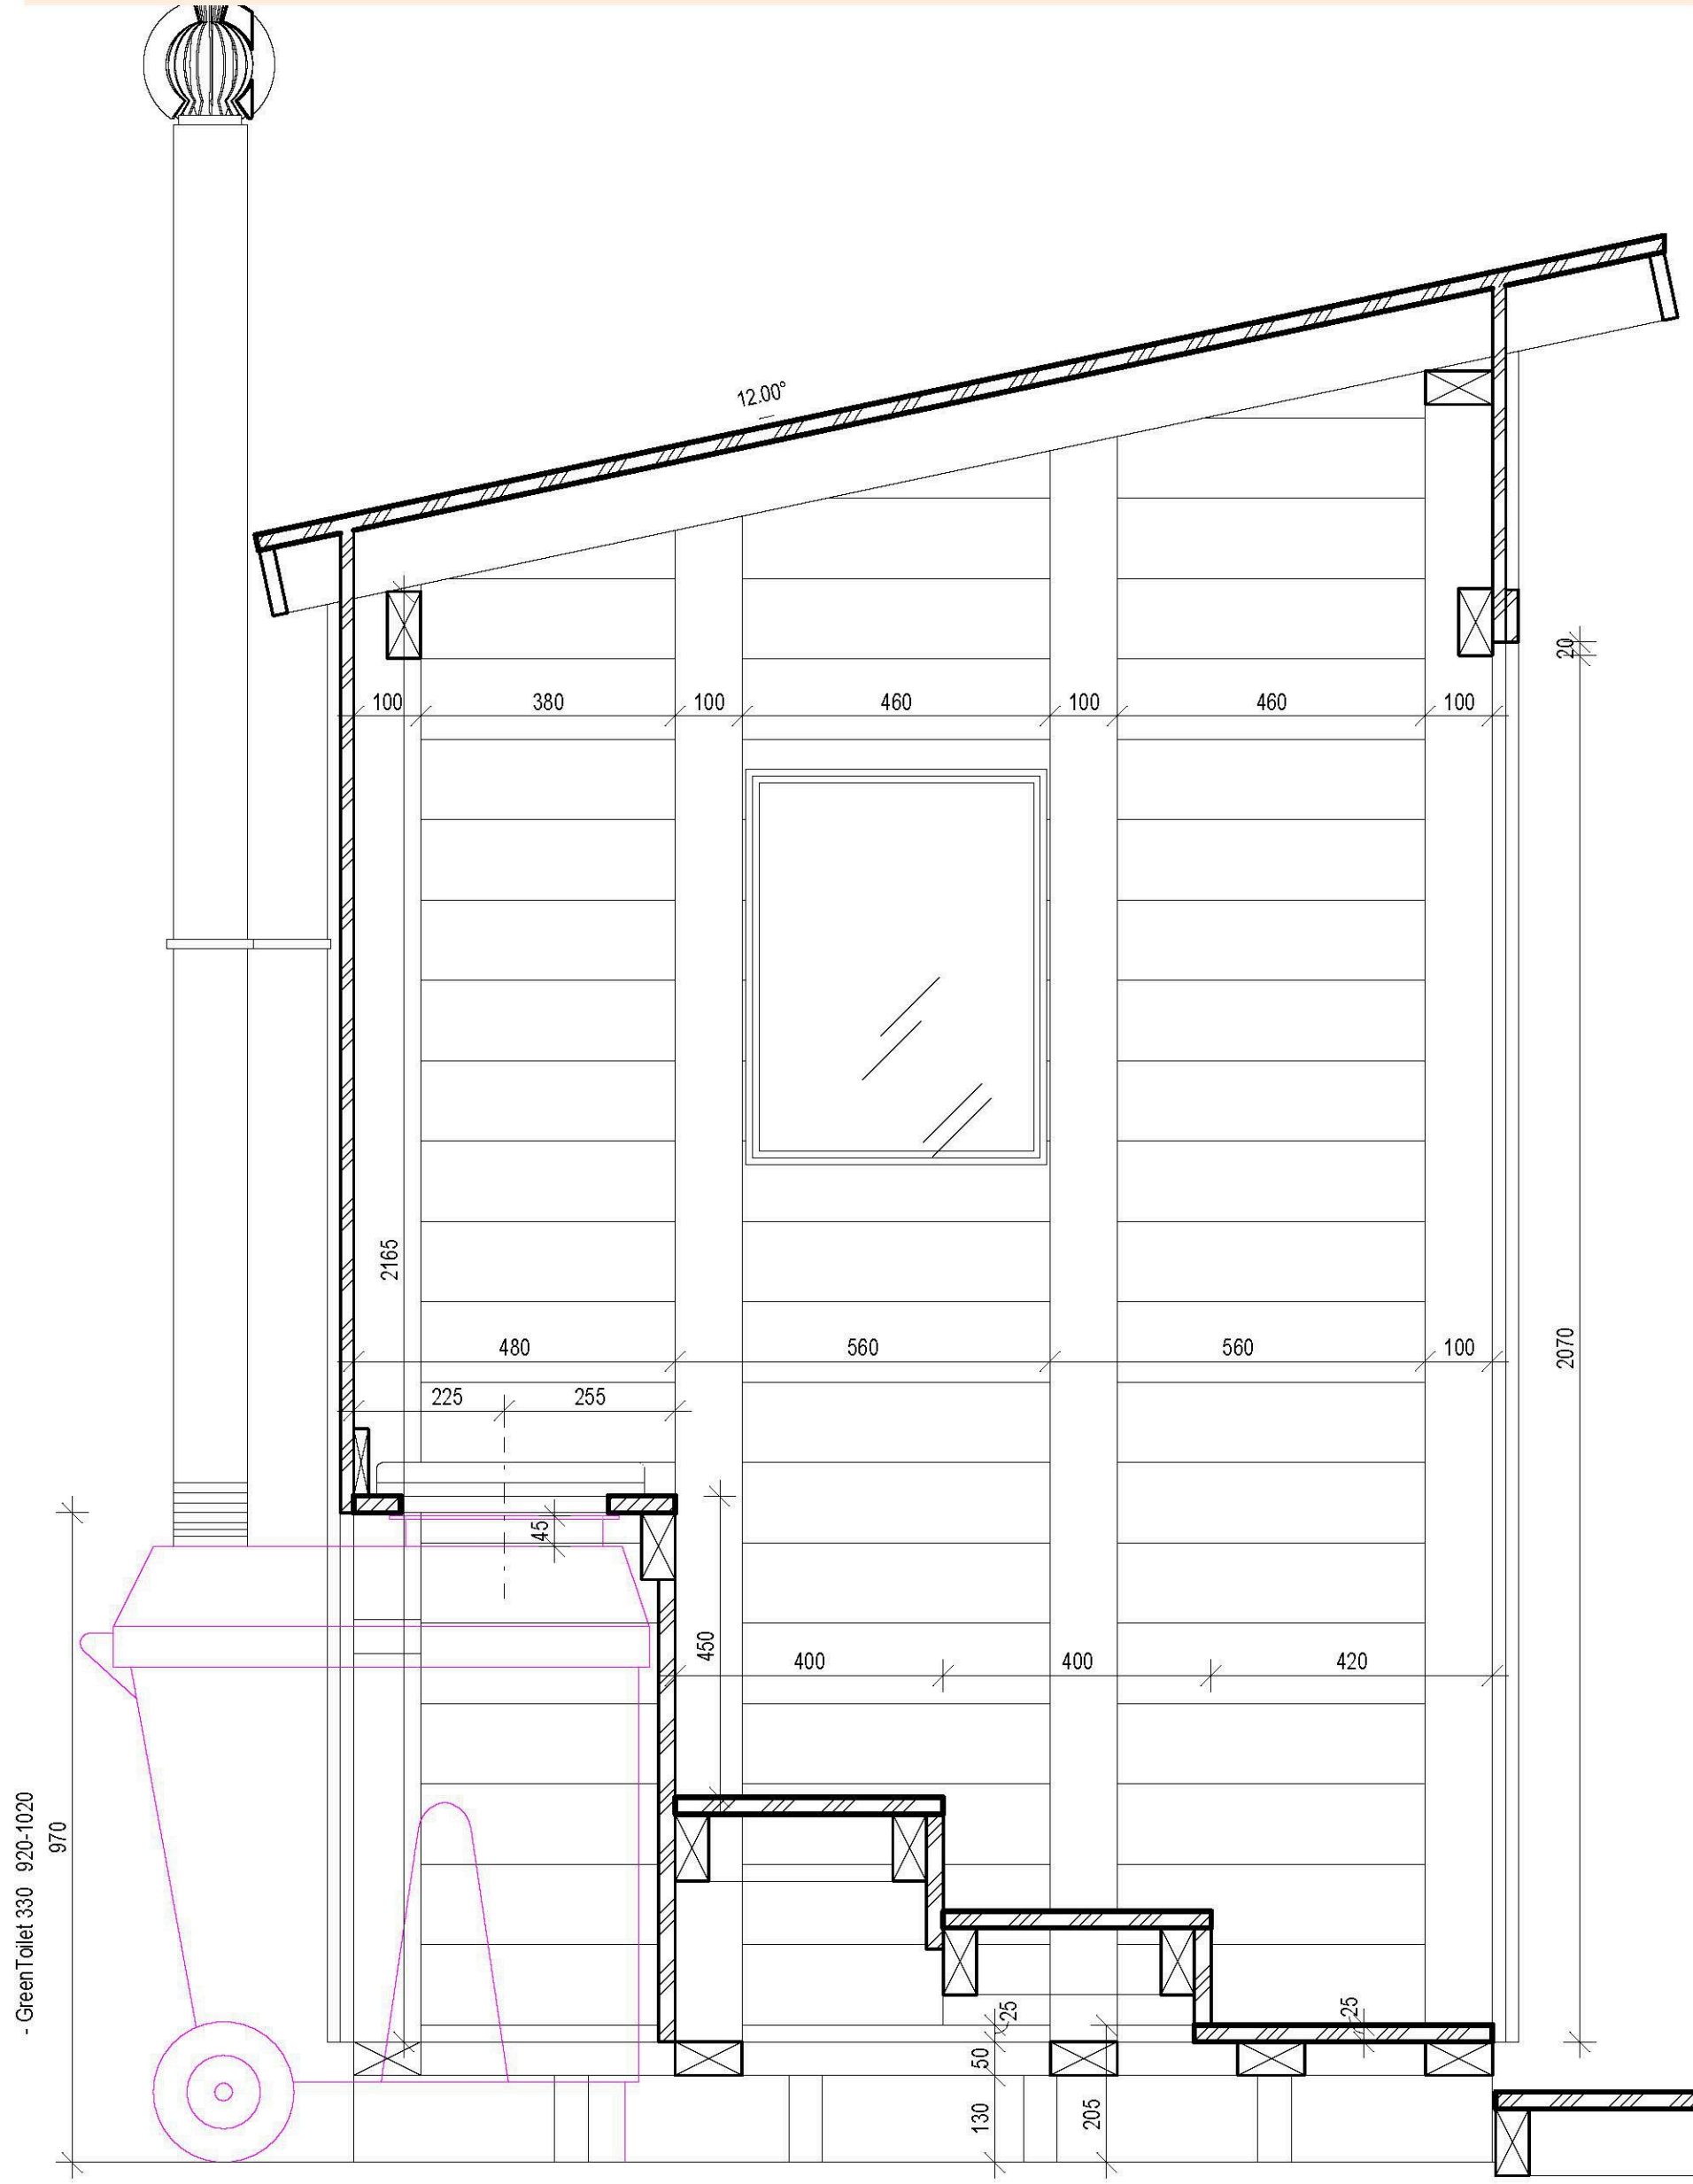


Waterless Toilet Shop

Outhouse Blueprints

Green Toilet 330

page 3

waterlesstoiletshop.com

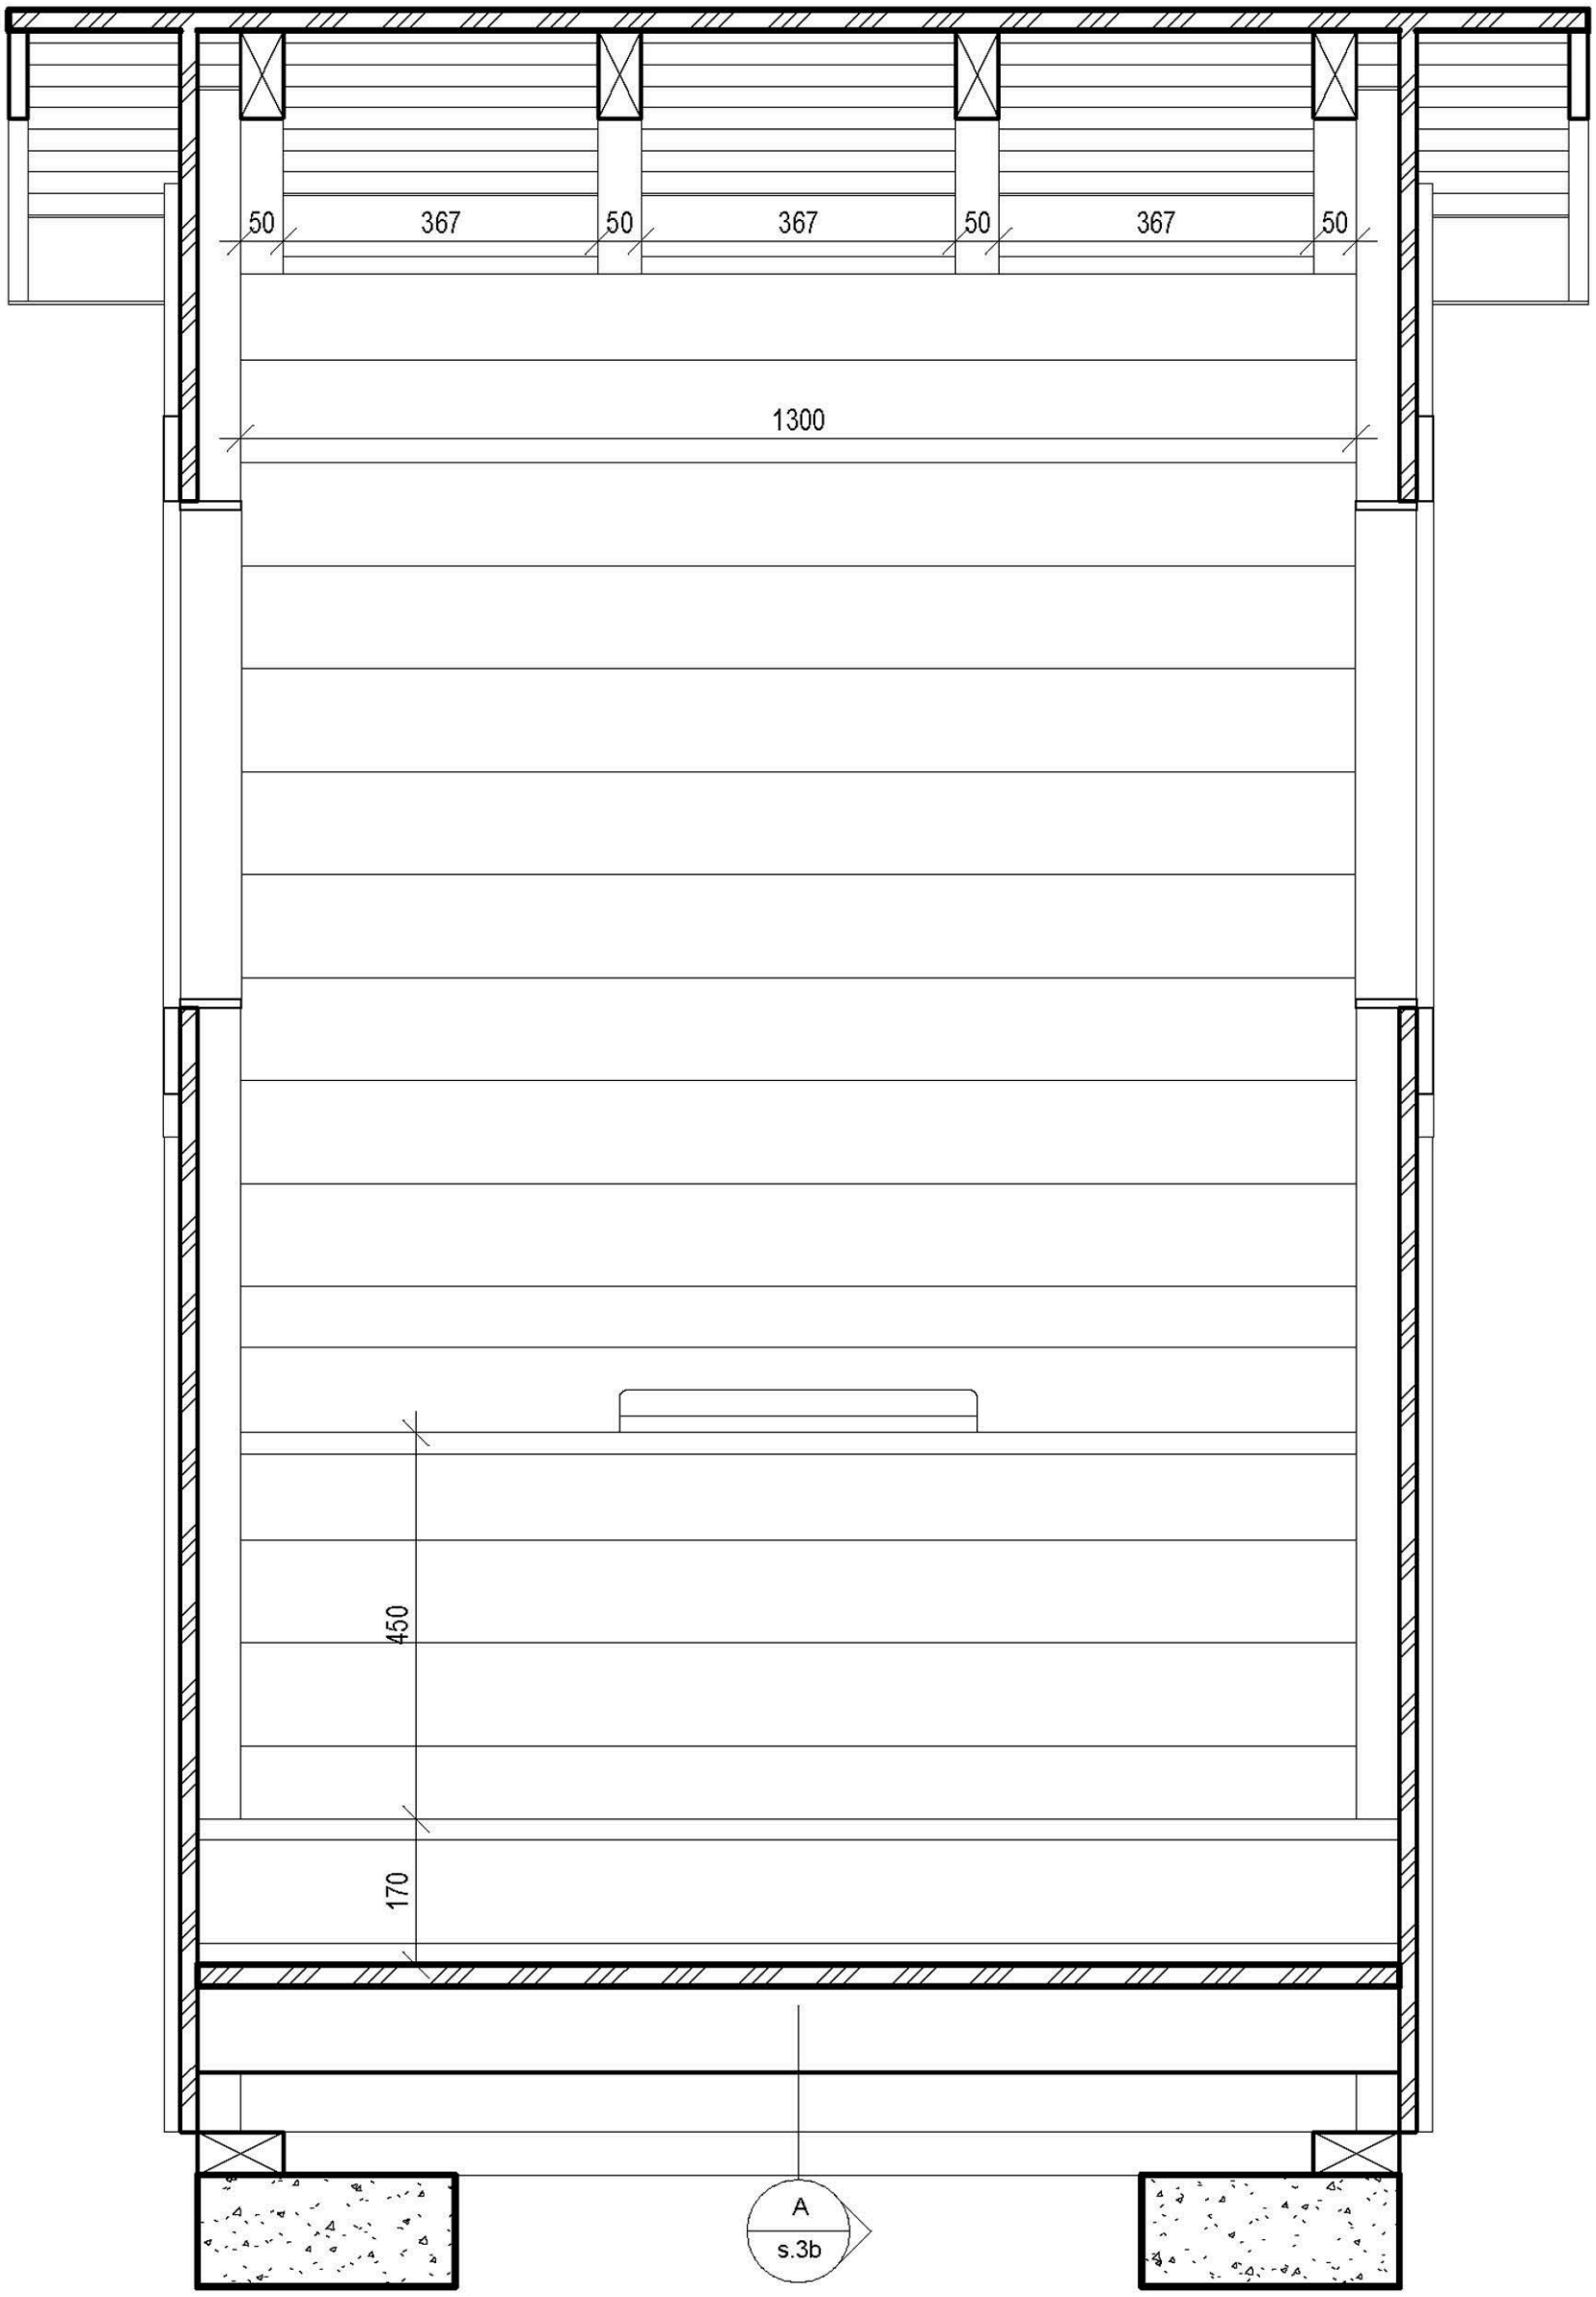

All measurements in millimeters